

## Mirror Cap Removal Manual: Toyota Tundra 07-On & Sequoia 08-On



1. Before we start, here is a picture showing how the cap is attached to the mirror housing. Since we DON'T need to remove the mirror glass, this picture is simply to make you familiar with the relative positions of the clips. Right-hand mirror is shown in this manual. Left-hand mirror is identical and is the mirror image of this manual. (Warning: Removing the mirror glass without professional help can cause the mirror glass to break and void the warranty on your original equipment mirror. If you cannot remove the cap using this manual, please seek help from a professional installer.)

## Mirror Cap Removal Manual: Toyota Tundra 07-On & Sequoia 08-On

2. To avoid breaking the mirror glass, cover the glass with a terry cloth. Push the mirror all the way in until you see the clip. Use a small LED-flashlight to help yourself see the clip. (Note: First clip to release is shown in picture 1.)



3. Using a flat-head screwdriver, unhook the first clip and push the cap outward until you see the cap come off a little as shown in picture 3.




4. Using both hands, pry the cap in the direction away from the door with a slow and wiggling motion (Note: you should feel some resistance prying-off the cap, but if too much resistance, try adjusting the direction of prying slightly.)



5. This is the back of the mirror housing after you have completed removing the old cap.

## Mirror Cap Installation Manual: Toyota Tundra 07-On & Sequoia 08-On

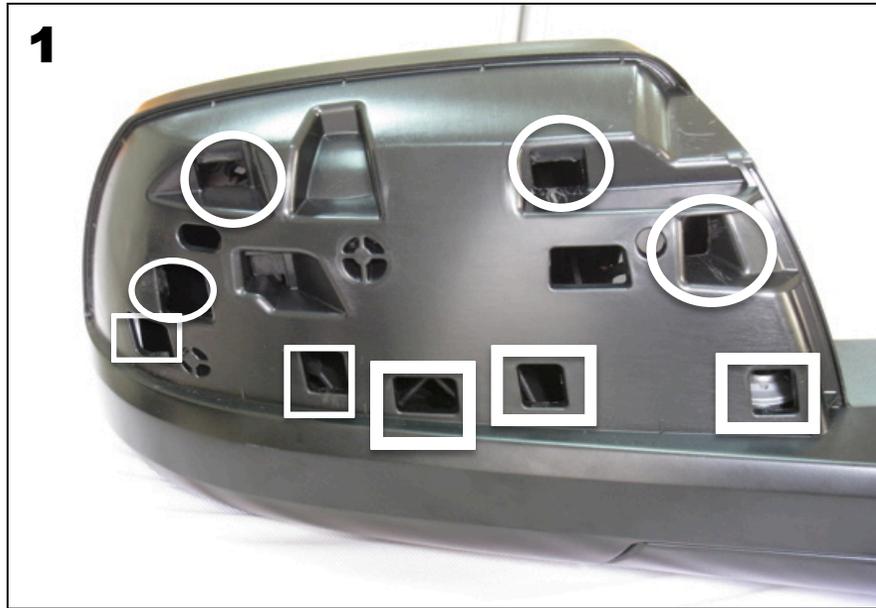

1. This picture shows 5 slots on the bottom in rectangles & 4 slots for clip insertion in circles.
2. Simply insert the bottom posts on the inside of your new cap into the bottom slots first.
3. Once the posts are secured, make sure the clips align with the 4 clip slots on top of the mirror housing and push in the cover. If you hear a “popping” sound, that means the clips are in place. (Warning: If you feel too much resistance during push-in, check if any of the clips are not aligned properly to avoid breaking the clips.)
4. When finish installing the cap, you should check from mirror glass side by pushing glass all the way in to check if all 4 clips are locked-in. Use a flashlight if necessary.

